

PowerWalker VFI 2000 LCD

Online UPS

2000VA Online UPS

8 IEC Outlets, RJ11/RJ45 Surge Protection, EPO function


USB & RS-232 Connection for monitoring

LCD display for status view and UPS settings

Optional: SNMP module, AS/400 card, Modbus card, EMD, Battery Pack, MBS, ATS





Item-No. 10120114

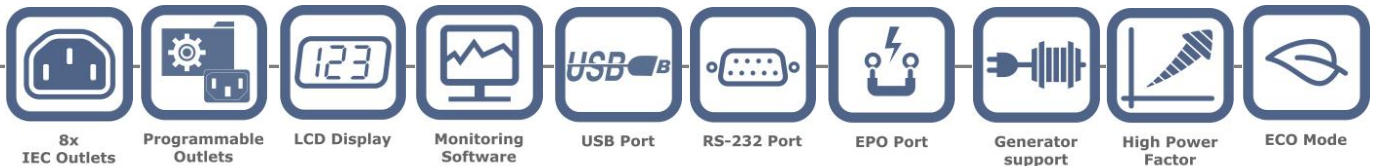

Product Features

With true double-conversion online UPS design, PowerWalker VFI 2000 LCD provides powerful and overall protection to your sensitive devices. It can accept wide input voltage for harsh environment. It offers full protection for critical devices such as sensitive servers, network/telephone communication systems as well as for industrial applications.

- True double-conversion
- Pure sine wave output
- Monitoring software included
- Output power factor 0.8
- Wide input voltage range (110-300 VAC)
- Input power factor correction 0.99
- 50/60 Hz frequency converter mode
- ECO mode operation for energy saving
- Programmable power management outlet
- Emergency power off (EPO) function
- Intelligent fan control for reduced noise level
- Smart battery charger to extend battery life
- Optional: SNMP module, dry contact AS/400 card, MBS, ATS, Battery Pack



Technical Details

Product Features

Capacity	2000VA / 1600W
Input	
Voltage Range Low Line Transfer	160/110VAC \pm 5% @ 100% load
Voltage Range Low Line Comeback	175VAC \pm 5%
Voltage Range High Line Transfer	300VAC \pm 5%
Voltage Range High Line Comeback	290VAC \pm 5VAC
Frequency Range	40Hz ~ 70Hz
Phase	Single phase with ground
Power Factor	\geq 0.99 @ Nominal Voltage (100% Load)
Output	
AC Voltage Regulation (Batt. Mode)	\pm 3 %
Frequency Range (Synchronized Range)	47 ~ 53Hz or 57 ~ 63Hz
Frequency Range (Batt. Mode)	50Hz \pm 0.25Hz or 60Hz \pm 0.3Hz
Current Crest Ratio	3:1
Harmonic Distortion	\leq 4% THD (Linear Load) \leq 7% THD (Non-linear Load)
Waveform (Batt. Mode)	Pure Sine Wave
Transfer Time	
AC Mode to Batt. Mode	zero
Inverter to Bypass	4ms (Typical)
Efficiency	
AC Mode	88 %
Battery Mode	83 %
Overload capacity	
AC Mode	Warning @ 100%-110% Bypass @ >110%
Battery Mode	Warning @ 100%-110% 30s @ 110%-130% Shutdown @ >130%
Battery	
Type	12V / 7Ah
Quantity	6x
Recharge Time	4h to 90%
LCD Display	
LCD Indicators	UPS status, Load level, Battery level, Input/Output voltage, AC mode, battery mode, Bypass mode, fault conditions

Audio Indicators

Battery Mode	Beep every 4sec
Low Battery	Beep every second
Overload	Beep twice every second
Fault	Continuously sounding

Connections

Communication	USB & RS-232 port
Outlets	8x IEC (4x programmable)
Surge Protection	RJ11/RJ45 (in/out)
Intelligent Slot	Yes
EPO	Yes

Software & System Requirements

Software	ViewPower
Operating System	For details visit: www.powerwalker.com/viewpower.html
Other	1x USB port or 1x RS-232 port

Product Details

Dimensions	421mm x 190mm x 318mm
Colour	Black
Weight	26.0kg
Fan Control	Always on, automatic speed control
Noise Level	< 45dB at 1 meter
Model Code	VFI 2000 LCD

Environment

Temperature	0°C – 40°C
Humidity	20 - 90% (non-condensing)

Package Content

Package Content	PowerWalker VFI 2000 LCD, Input power cord, 2x IEC cable, USB cable, Software CD, manual
------------------------	--

Optional Accessoires

See next page

Logistic Data

Giftbox Language	EN/DE/FR/ES/IT/PT/SE/FI/NO/TR RU/UA/BY/PL/CZ/HR/HU/BG/KZ/CS
Manual Language	EN/DE/FR/ES/RU/IT/PT
Dimension/Giftbox	560 x 320 x 460 mm
Weight/Giftbox	28.5kg
Pieces/Carton	1
Pieces/Palette	16
Item Number	10120114
EAN	4260074974256
Warranty	24 Months (except battery)

Available accessories

Use UPS configurator on www.powerwalker.com for detailed backup time information.



SNMP manager
 Datasheet: [Link](#)
 Item No.: 10120505



EMD for SNMP Manager
 Environmental Monitoring
 Device Monitor Temperature
 & Humidity
 Datasheet: [Link](#)



Modbus Card
 Datasheet: [Link](#)
 Item No.: 10120565



AS/400 Card
 Datasheet: [Link](#)
 Item No.: 10120515



ATS (Automatic Transfer Switch)
 Datasheet: [Link](#)
 Item No.: 10120543



MBS (Maintenance Bypass
 Switch)
 Datasheet: [Link](#)
 Item No.: 10120500



Yuasa 12V/7Ah
 battery
 Datasheet: [Link](#)
 CSB or Panasonic brand
 can also be used



Yuasa 12V/9Ah
 battery
 Datasheet: [Link](#)
 CSB or Panasonic brand
 can also be used



Battery Pack with inside 2x Battery Sets
 (Each battery set contain 6x 12V/9Ah
 batteries)
 Datasheet: [Link](#)
 Item No.: 10120575



Battery Pack with 3A charger
 (with inside 3x Battery Sets)
 (Each Set contain 6x 12V/9Ah)
 Datasheet: [Link](#)
 Item No.: 10120585



Battery Pack with inside 1x Battery Sets
 (Battery set contain 6x 12V/9Ah batteries)
 Datasheet: [Link](#)
 Item No.: 10120511
 Possible to connect more than 1 Battery Pack



RS-232 cable
 Item Nr.: 91010012

USB cable
 Item Nr.: 91010011



Schuko Input -> IEC C13
Item Nr.: 91010017



UK Input -> IEC C13
Item Nr.: 91010029

Swiss Input -> IEC C13



IEC C13 -> IEC C14
Item Nr.: 91010013



Schuko Input -> IEC C19
Item Nr.: 91010018

UK Input -> IEC C19
Item Nr.: 91010030

Swiss Input -> IEC C19



IEC C19 -> IEC C20
Item Nr.: 91010028



IEC C13 -> IEC C20
Item Nr.: 91010041



IEC C14 -> IEC C19
Item Nr.: 91010040



IEC C14 -> Schuko
Converter
Item Nr.: 91015003



Schuko -> UK adaptor
Item Nr.: 91010031