



# 1. Document

1. JavaForOSX2014-001.dmg is the installation running environment.
2. Kext\_Helper\_b7.zip is tool to install USB driver.
3. UPSVendor.zip is USB driver
4. Before installing monitor software, please install USB driver first.
5. MAC OS 10.10 will pop up a dialog as below when installing monitoring software. Click OK and download “JavaForOSX2014-001.dmg” from the link <http://www.power-software-download.com/JavaForOSX2014-001.dmg>

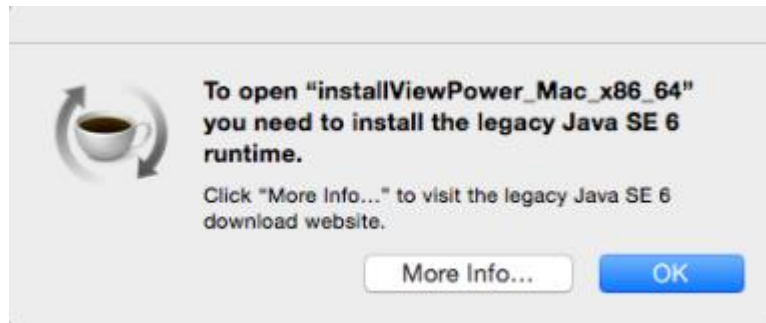

# 2. Install JavaForOSX

Step 1. Double click “JavaForOSX2014-001.dmg”

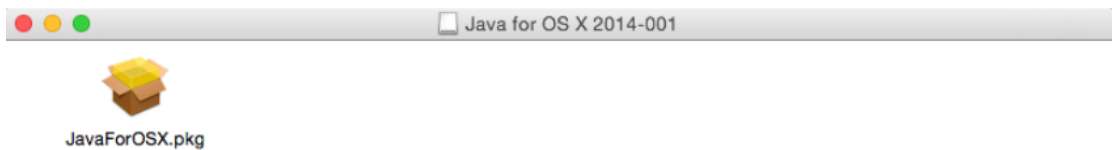


Step 2. Double click “JavaForOSX.pkg”







Click "Continue" button.

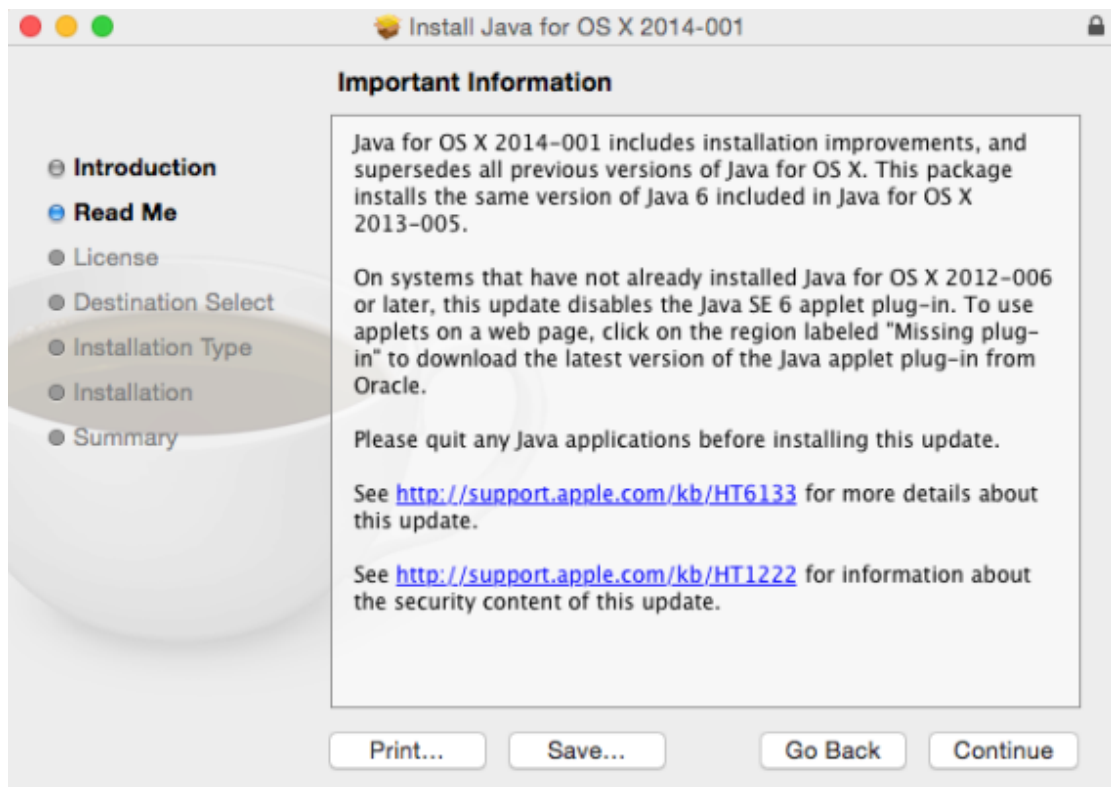


Click "Continue" button.

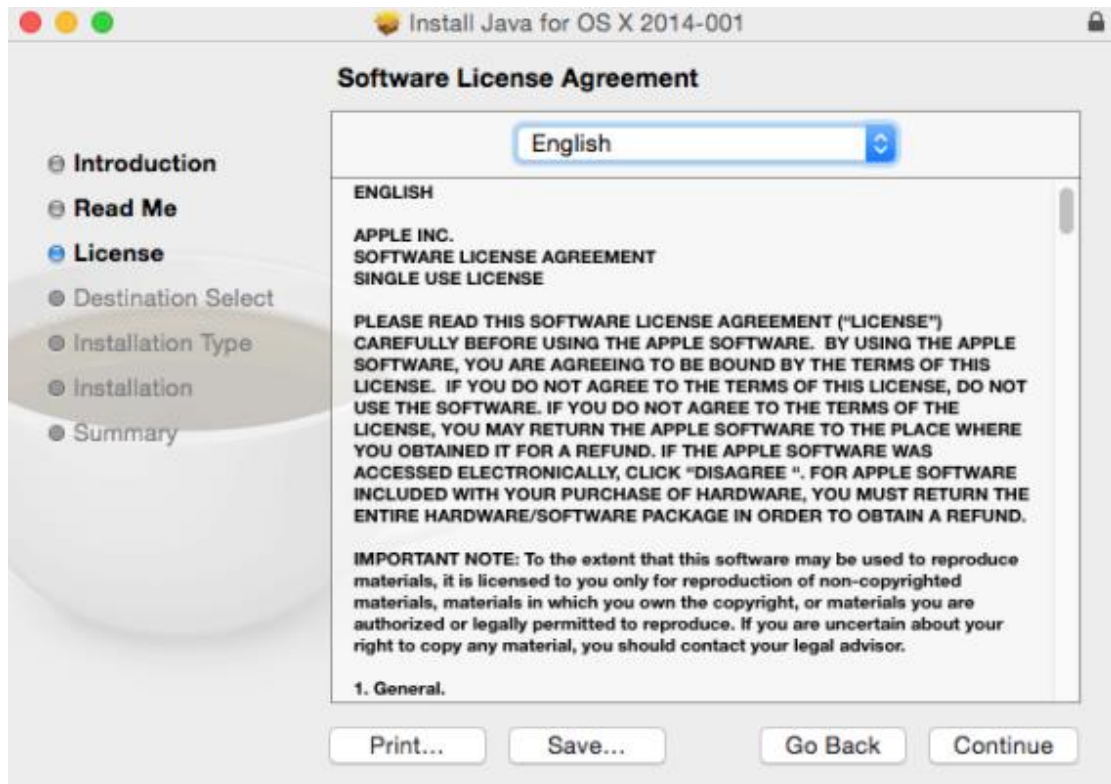

Click "Continue" button.

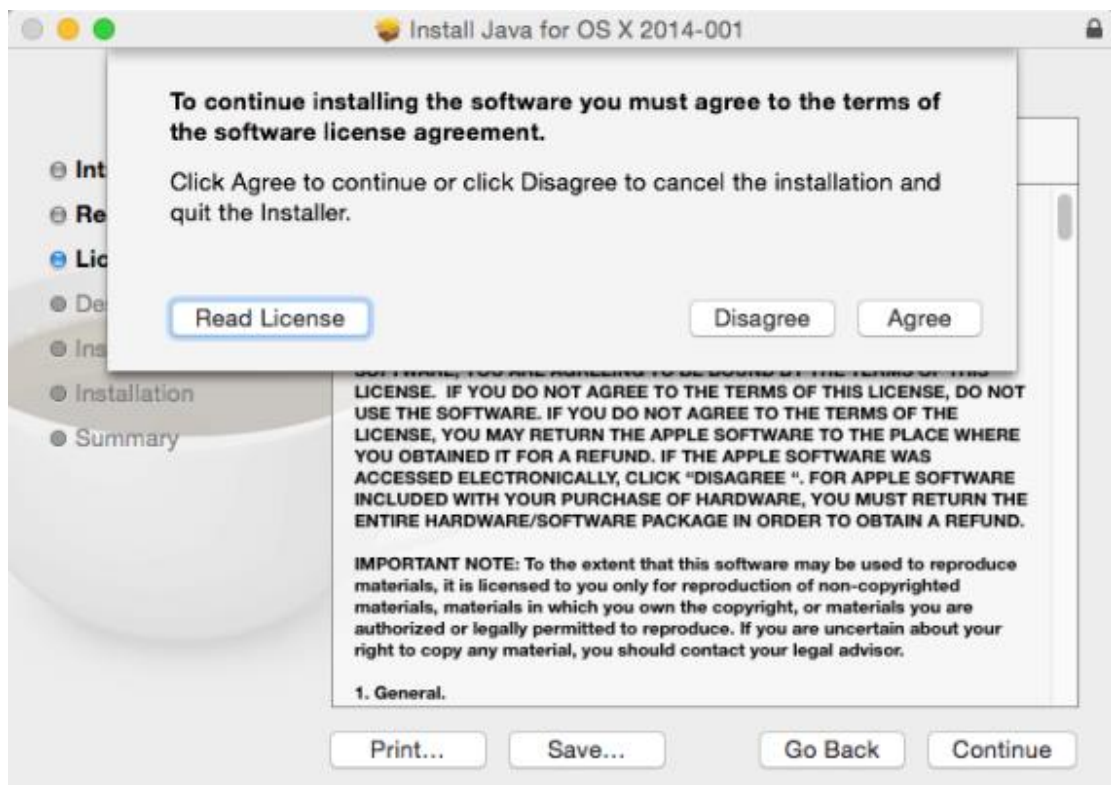


Click "Agree" button.

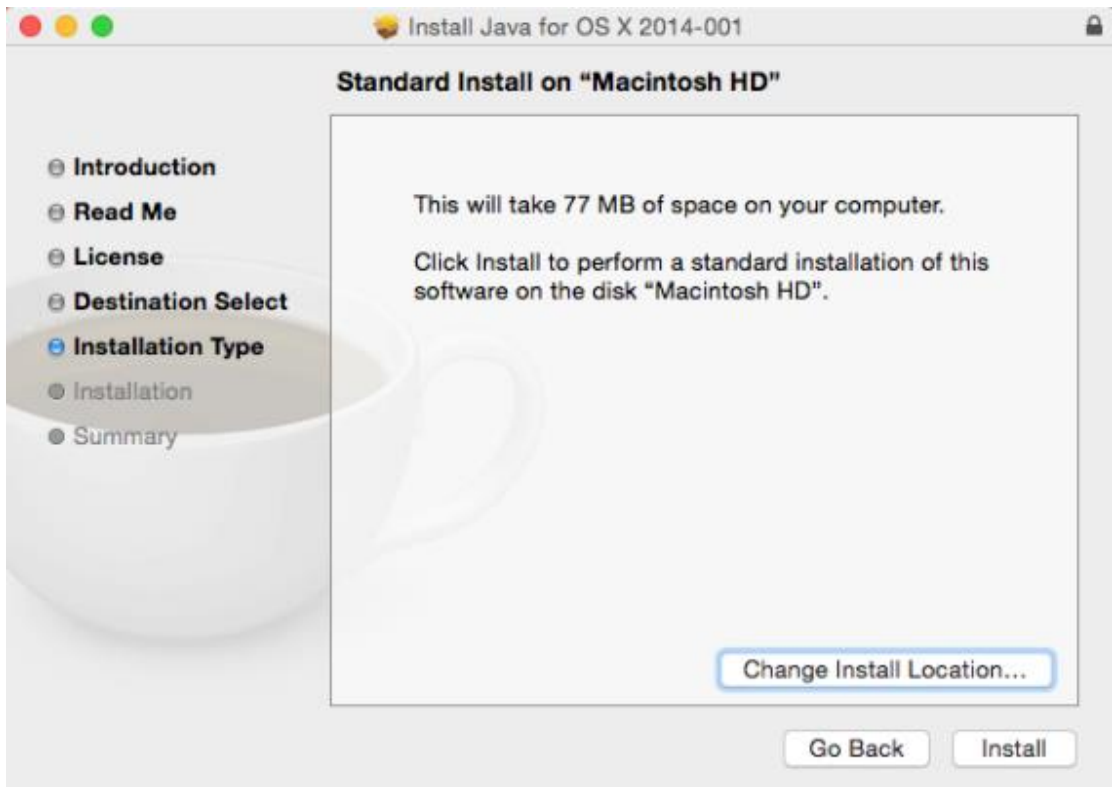

Click "Install" button.



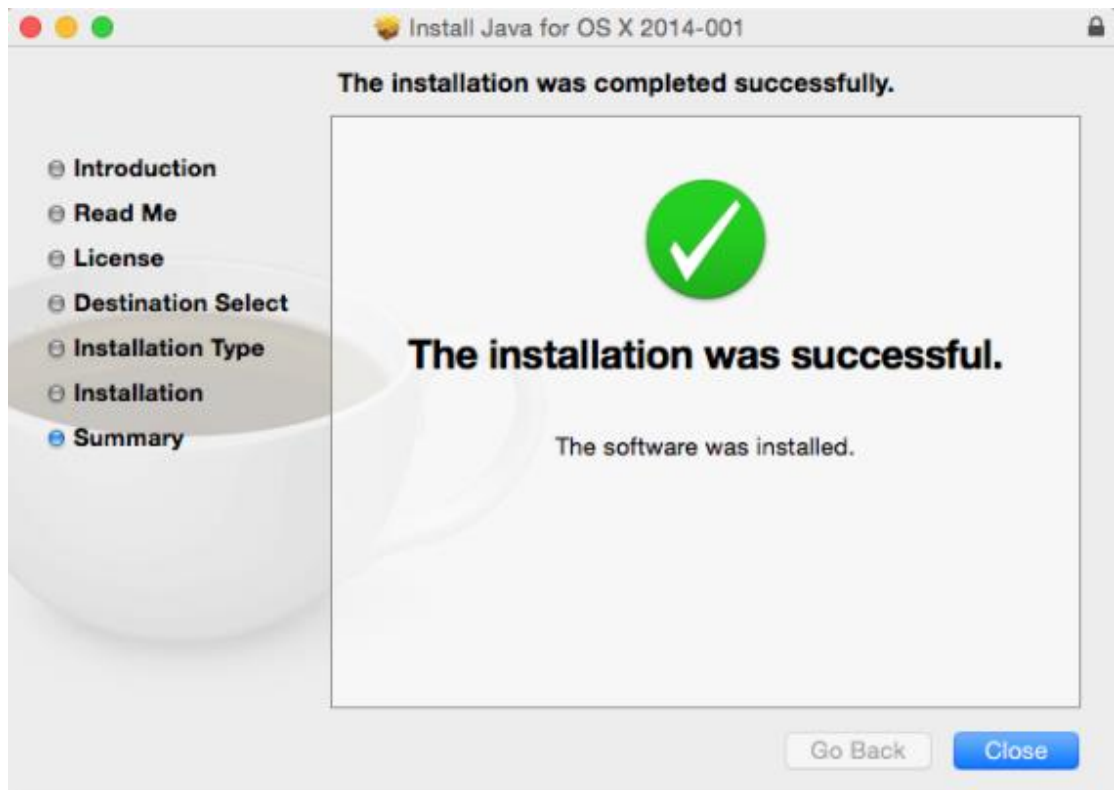

Click "Close" screen.

### 3. Install USB driver


Link to [http://www.power-software-download.com/Kext\\_Helper\\_b7.zip](http://www.power-software-download.com/Kext_Helper_b7.zip) and <http://www.power-software-download.com/UPSVendor.zip>. Then, download 2 files.

**Step 1.** Extract Kext\_Helper\_b7.zip and UPSVendor.zip.

**Step 2.** Double click the icon of kext Helper b7.




**Step 3.** It will pop up a dialog as below.

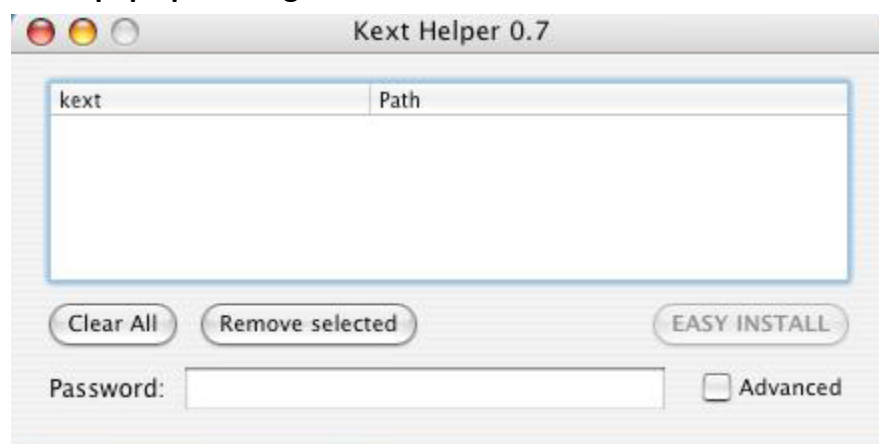




**Step 4.** Drag and release “UPSVendor.kext” into the dialog of Kext Helper 0.7.

**Step 5.** The document will be displayed in the list.

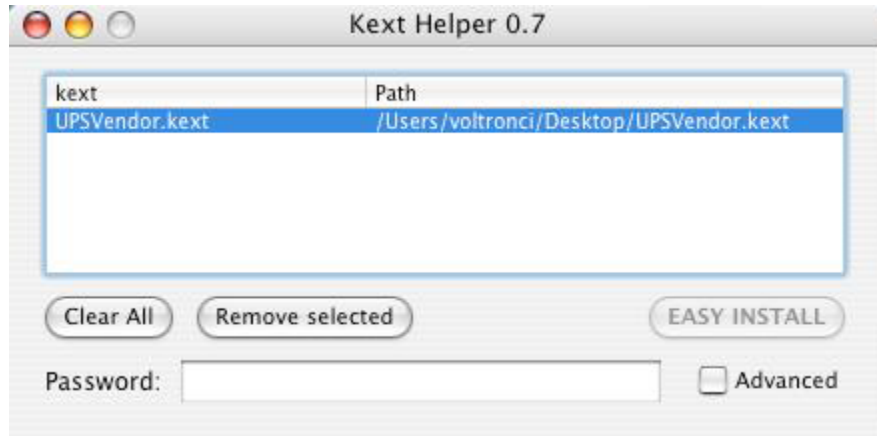

**Step 6.** Enter user password and click “EASY INSTALL” button to install USB driver.

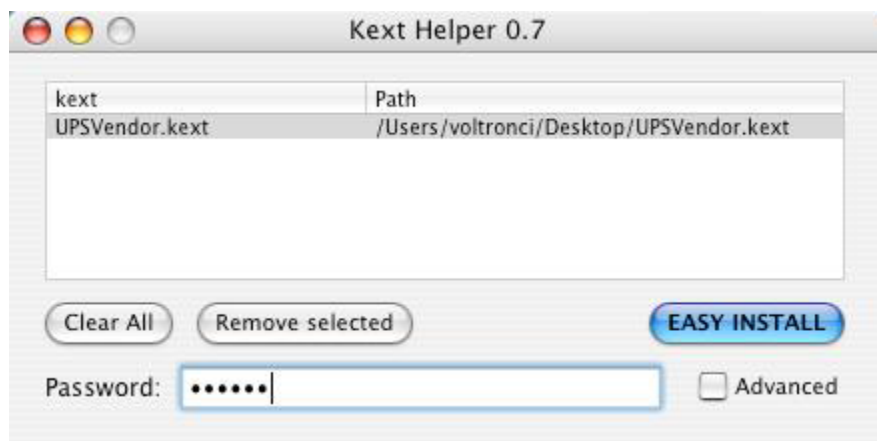

**Step 7.** USB Driver Installation is complete.


## 4. Install monitoring software

After JavaForOSX and USB driver have installed, then install monitoring software.


Take ViewPower as an example:



Click "OK" button.

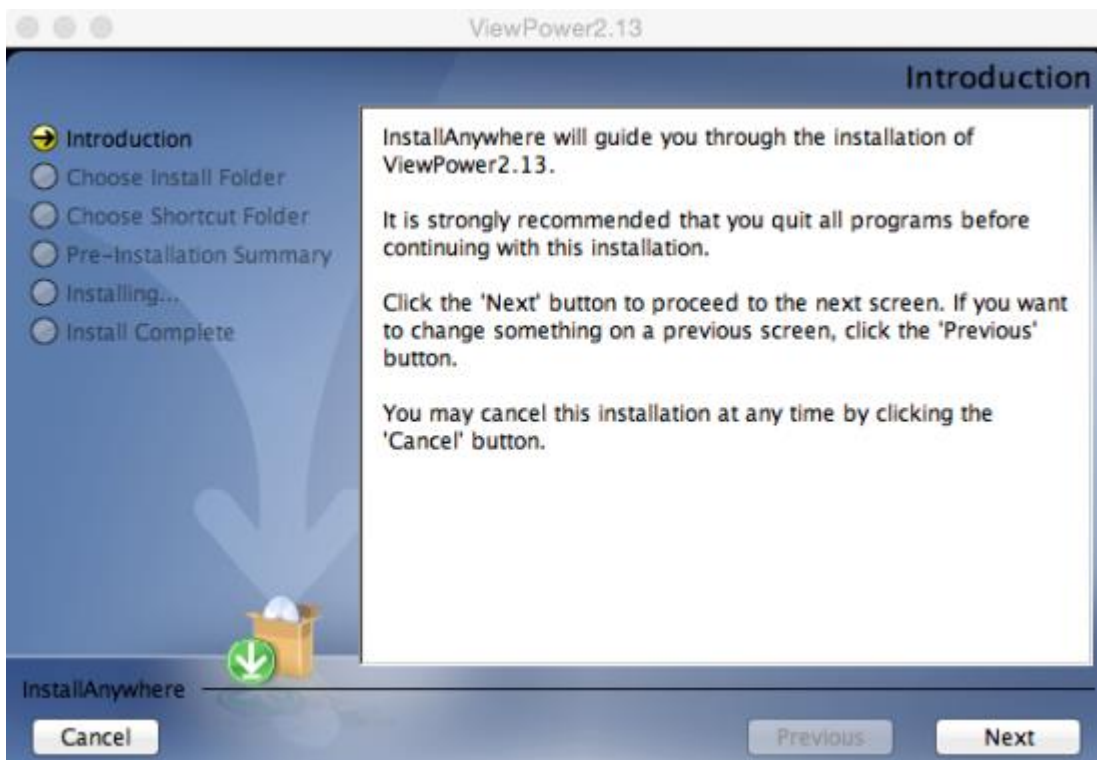

Click "Next" button.

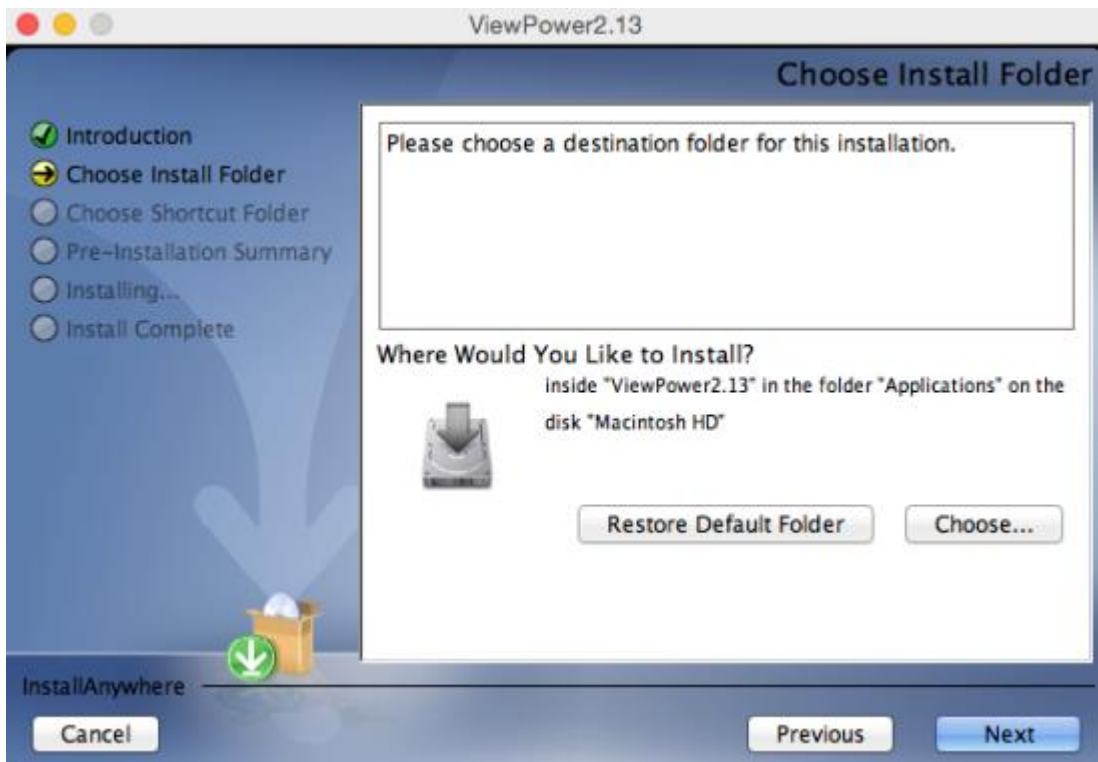


Choose a destination folder and click "Next" button.



Click "Install" button.



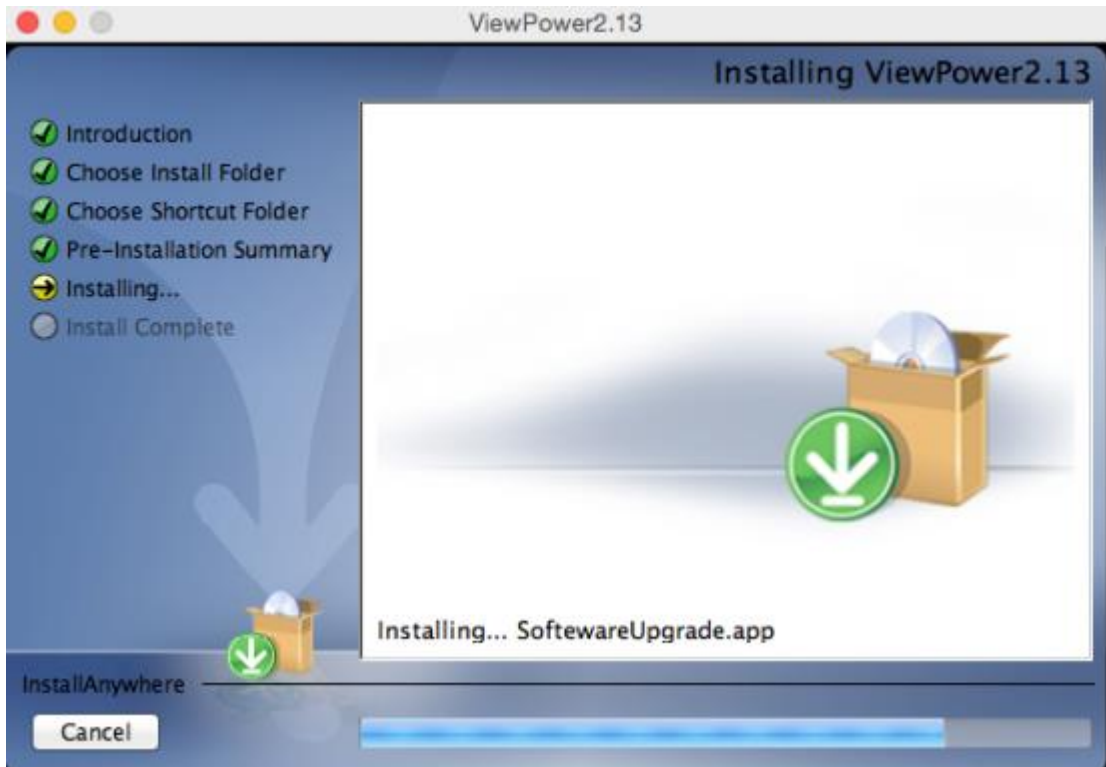

Click "done" button and the installation is complete.